

### Hurricane

Design Pressure – ranging from  
+/- 50 psf to +/- 150 psf  
Water infiltration – ranging from  
+/- 50 psf to +/- 60 psf

### Testing

CURRIES products are only third party independently tested and certified. For more information:  
[www.ul.com](http://www.ul.com)  
[www.intertek.com](http://www.intertek.com)  
[www.floridabuilding.org](http://www.floridabuilding.org)

### Doors Options

607 Polystyrene  
707 Polystyrene, Polyurethane,  
and Honeycomb  
727 Temperature Rise  
747 Steel Stiffened  
777 Trio  
777E Trio-E  
Glazing options available  
Size ranges –  
2'8" x 6'8" to 4'0" x 8'0" available

### Frame Options


Single openings  
Paired openings  
Sidelite options up to  
12'10" x 8'0"  
Transom options up to  
6'0" x 10'0"  
(larger sizes available in store  
front applications)

### Hardware Options

CORBIN RUSSWIN  
MARKAR  
MCKINNEY  
RIXSON  
ROCKWOOD  
SARGENT  
SECURITRON  
VINGCARD ELSAFE  
YALE  
YALE YM

1502 12th Street NW  
Mason City • IA 50401  
Phone: 641-423-1334  
Fax: 641-424-8305

Experience a safer  
and more open world

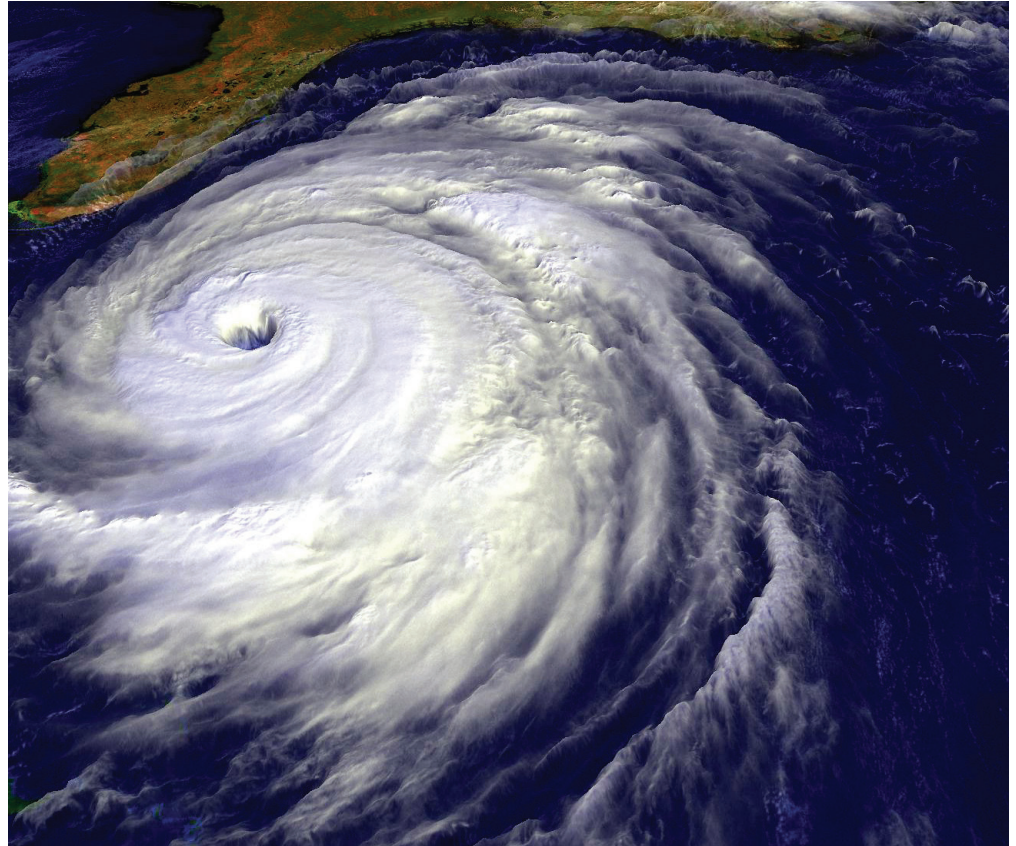

## Complete Line of Windstorm Products to Meet Hurricane Codes

CURRIES, along with other ASSA ABLOY group companies are continuing in our efforts to make more products available for Hurricane codes including water infiltration requirements. CURRIES complete line of doors and frame products combined with the ASSA ABLOY hardware brands gives building engineers more choices in providing openings that meet the tough standards of local building codes, security requirements of the owner, and functionality needs of the occupants. CURRIES can provide a wide selection of products to meet each building requirements.

Find updates on [www.curries.com](http://www.curries.com)