


# EXEMPLA™

## PROFILED PANEL SYSTEM

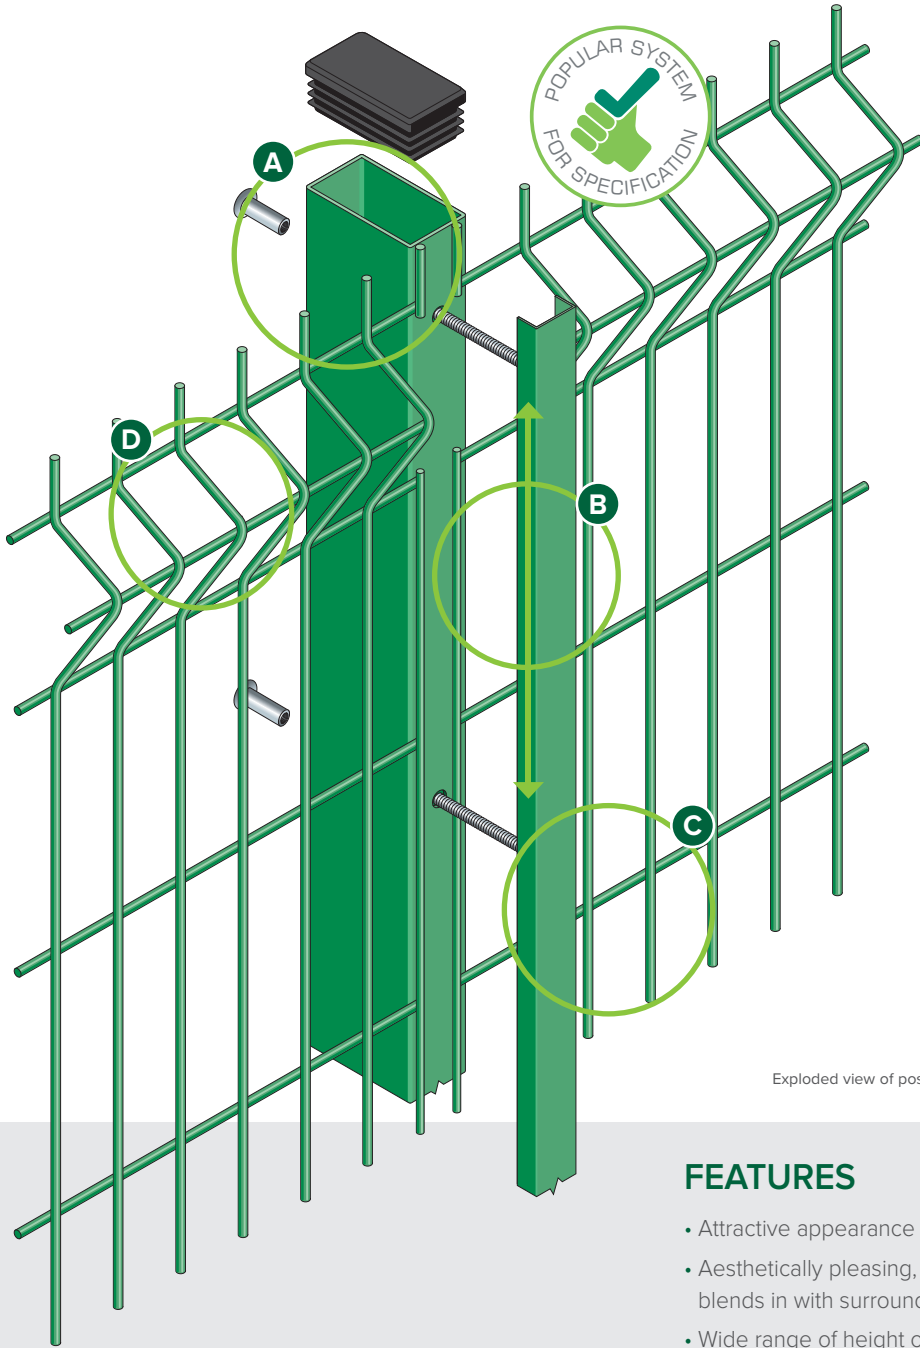

- A** Galvanised and polyester powder coated panels and posts
- B** Full length clamp bar for secure fixing and infinitely variable panel stepping within post length
- C** Unique 'SafeTfix' hidden fixing system
- D** Profiled for extra strength

**SafeTfix**



SafeTfix fixing system for added safety & security.



Exploded view of post and clamp for Exempla panel system


### FEATURES

- Attractive appearance
- Aesthetically pleasing, effortlessly blends in with surroundings
- Wide range of height options
- Full range of RAL colours available


### SUITABLE FOR

- Public buildings
- Schools
- Car parks
- Business parks and retail premises


### SYSTEM DETAILS




Plan of end



Plan of panels in line



Plan of internal corner



Plan of external corner



## DESCRIPTION

The Exempla™ Perimeter Security Fencing Solution offers rigid profiled mesh panels matched with a secure fixing design unique to CLD Fencing Systems. The combination of these produces a fencing product that can stand up to all the requirements of a secure fence line.

Designed for simple installation around the exterior of your property, premises or land, Exempla™ features rigid mesh panels held securely to 60 x 40mm RHS steel posts using our SafeTfix™ hidden fixing system.

Manufactured from 5mm steel wire and welded on each cross over point, the panels are profiled and finished in polyester powder coating for a superior finish.

Available in a choice of RAL colours to match your company or project branding the Exempla™ fencing solution is designed to be the first line of defence for your physical assets.

## FINISH

Galvanised and polyester powder-coated, after stringent cleaning and treatment, to give a well adhered coating of a minimum of 60 microns. The full RAL range of colours available.

## PANEL DIMENSIONS

<b>Heights</b>	630, 830, 1030, 1230, 1530, 1730, 1930, 2330, 2530, 2730, 3030mm
<b>Panel width</b>	2485mm
<b>Mesh size</b>	200 x 55mm
<b>Wire diameter</b>	5mm
<b>Triangular folds</b>	2, 3 or 4
<b>Top edge projection</b>	30mm †

† Can be inverted to give flush edge.  
All dimensions are nominal

## EXEMPLA POSTS AND CLAMPS

For the Exempla profiled panel system, CLD offers a standard post and clamp system which provides a complete method of securing, allowing infinitely variable stepping of panels. It is versatile, strong, simple to fix and vandal-resistant, yet allows panels to be removed without damage to either post or clamp. Accidentally damaged panels can be replaced without removing the post.



## SLOPING GROUND

Panels can be stepped as required. Where gradients exceed 1:16, it is recommended that taller panels are either part-buried or additional posts are used.

## VARIATIONS

In addition to the standard posts many variations are available to accommodate site requirements:

- Alternative sections
- Wall fixing plates, cranked posts or base plated
- Cranked or straight extensions for barbed or razor wire
- Cranked panels



## DIMENSIONS

<b>Posts</b>	60 x 40mm RHS (up to 2730mm) 80 x 40mm RHS (3000mm)
<b>Clamping channels</b>	41 x 21mm
<b>Post centres</b>	2495mm